


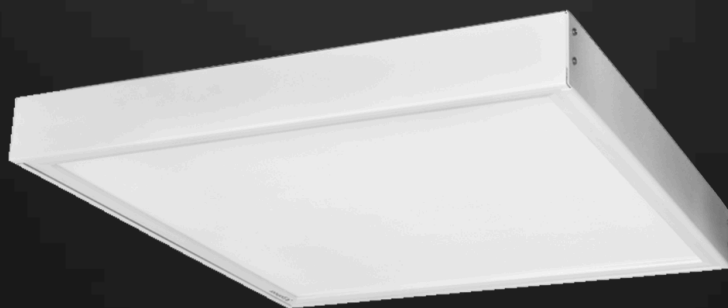

Surface Mounted Light

ARSHID-SURFACE-MOUNTED

Discontinued

Golnoor

Light up Your Life

Learn more about “Arshid-surface-mounted”

The Arshid surface-mounted luminaire, available in 36 and 54-watt models, is a versatile indoor lighting solution for educational institutions, healthcare facilities, offices, retail, and terminals. With color temperatures of 4500 and 6500 Kelvin and a long lifespan of 70,000 hours, it's an effective lighting choice.



Class II



High PF



LED luminaire



Modular



Quick
installation



Symmetrical
light emission

- **Arshid-surface-mounted**



Surface Mounted Light

5 years Golnoor Warranty

- **Index : Power (watt)**

— 36

— 54

- **Applications**

— Indoor

— Retail & Commercial

— Offices

— Residential Complexes

— Healthcare

— Corridors, Stairs & Lifts

— Shops & Showrooms

— Schools & Universities

— Hospitals

— Clinics & Medical Offices

— Libraries

— Control & Server Rooms

- **Solutions**

— Architectural Lighting

ARSHID-SURFACE-MOUNTED

TECHNICAL SPECIFICATIONS

Review the technical specifications, dimensions, performance data, and related resources for Arshid-surface-mounted

Index (Power (watt))		36		54	
Optical characteristics					
LED Package Nominal Power (W)		1.2			
Luminaire Efficacy (lm/W)		120			
Initial SDCM (SDCM)		5			
Color Rendering Index		85			
LED Module Type		Integrated			
Light Source		SMD LED			
Lumen Maintenance Code		9			
LEDs Per Module (pcs)		108		144	
Luminous Flux (lm)		4320		6480	
Color Temperature (K)		4500		6500	
Electrical characteristics					
Input Voltage (V)		Min 180		Max 265	
Input Frequency (Hz)		Min 50		Max 60	
Nominal Input Voltage (V)		230			
Nominal Input Frequency (Hz)		50			
Power Factor		0.95			
Total Harmonic Distortion (%)		15			
Electric Shock Protection Class		II			
LED Module Operating Voltage (V)		36			
Type of Power Supply		Independent			
Nominal Input Current (A)		0.165		0.25	
General characteristics					
Mounting Type		Surface Mounted			
Working Temperature Range (°C)		Min -45		Max 55	
Maximum Relative Humidity (%)		90			
Rated Useful Life L70B10 (h)		70000			
Warranty (year)		5			
Mechanical characteristics					
Housing Material		ABS			
Frame Material		Iron			
Optical Cover Material		PS			
Surface Finish		Electrostatic Powder Coating			
Dimensions (mm)		L: 600 · W: 600 · H: 70			
Weight (kg)		3.2			
Ingress Protection		IP42			

L: length · W: width · H: height · Ø: diameter

This is a compact product summary; visit the website for more details.

<https://golnoor.com/en/product/arshid-surface-mounted>

Golnoor

Light up Your Life

WWW.GOLNOOR.COM
