

Industrial Light | Industrial Linear

ATLAS-I

Golnoor

Light up Your Life



Learn more about “Atlas-i”

The 36W Atlas i light is perfect for industrial spaces like halls, factories, parking lots, warehouses, and storage areas. It's easily installed on surfaces or walls, catering to outdoor lighting needs. Its robust aluminum body, electrostatic powder coating, and IP65 waterproof rating ensure durability in any environment.



Class I



High PF



IP65



LED luminaire


Loop Through




Quick installation


Suspended luminaire


Symmetrical light emission


Wall luminaire

Atlas-i



Industrial Light | Industrial Linear

3 years Golnoor Warranty

Index : Power (watt)

- 36

Applications

- Outdoor
- Indoor Car Parks
- Outdoor Parking
- Industrial & Manufacturing

Solutions

- Industrial Lighting

ATLAS-I
TECHNICAL SPECIFICATIONS

Review the technical specifications, dimensions, performance data, and related resources for Atlas-i

Index (Power (watt))	**36**
Optical characteristics	
LED Package Nominal Power (W)	**1.5**
Initial SDCM (SDCM)	**5**
Color Rendering Index	**75**
LED Module Type	**Integrated**
Light Source	**SMD LED**
Lumen Maintenance Code	**9**
Luminous Flux (lm)	**3100** | **3250**
Luminaire Efficacy (lm/W)	**86** | **90**
Color Temperature (K)	**3,000 ~ 6,500** 3000 · 4000 · 5000 · 6500
LEDs Per Module (pcs)	**36**
Electrical characteristics	
Input Voltage (V)	Min **200** | Max **240**
Input Frequency (Hz)	Min **50** | Max **60**
Nominal Input Voltage (V)	**230**
Nominal Input Frequency (Hz)	**50**
Nominal Input Current (A)	**0.18**
Power Factor	**0.9**
Total Harmonic Distortion (%)	**45**
Electric Shock Protection Class	**I**
LED Module Operating Voltage (V)	**220**
Type of Power Supply	**Integrated**
General characteristics	
Mounting Type	**Pole Mounted** | **Surface Mounted** | **Wall Mounted**
Working Temperature Range (°C)	Min **-45** | Max **55**
Maximum Relative Humidity (%)	**95**
Rated Useful Life L70B10 (h)	**70000**
Warranty (year)	**3**
Mechanical characteristics	
Housing Material	**Aluminium**
Optical Cover Material	**Pc**
Surface Finish	**Electrostatic Powder Coating**
Dimensions (mm)	**L: 900 · W: 92 · H: 69.5**
Weight (kg)	**1.46**
Ingress Protection	**IP65**


L: length · W: width · H: height · Ø: diameter

This is a compact product summary; visit the website for more details.

https://golnoor.com/en/product/atlas-i

Dimensions

Review overall dimensions and layout drawings for installation planning, placement, and site coordination.

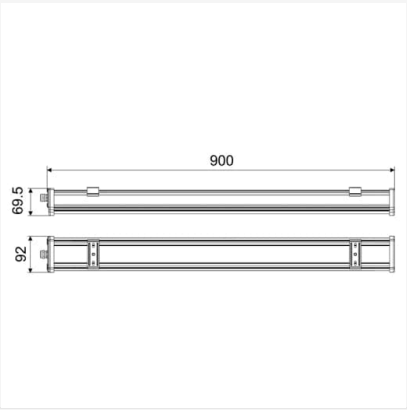

01 **Atlas-i**

Golnoor

Light up Your Life

WWW.GOLNOOR.COM