



Pendant Light

PARMIN PENDANT

Golnoor

Light up Your Life

Learn more about “Parmin Pendant”

Parmin is a modern, minimalist pendant luminaire designed for indoor spaces, providing uniform, flicker-free light that ensures high visual comfort. With high luminous efficacy, a 0.95 power factor, and a 70,000-hour lifetime, it is an economical and sustainable choice for office and commercial projects. Its modular design, quick installation, and variety of sizes and power options make it highly flexible for offices, educational, healthcare, and retail environments. With symmetrical light distribution, a lightweight polymer body, and a clean appearance, Parmin integrates seamlessly with modern architecture.



Class I



Flicker Free



High PF



LED luminaire



Modular



Quick installation



Suspended luminaire



Symmetrical light emission

● Parmin Pendant



Pendant Light

5 years Golnoor Warranty

● Index : Nominal Size

- 300 × 300
- 600 × 600
- 1200 × 300

● Applications

- Indoor
- Retail & Commercial
- Offices
- Residential Complexes
- Healthcare
- Meeting & Conference Rooms
- Lobbies & Receptions
- Restaurants & Cafés
- Hotels
- Shops & Showrooms
- Libraries
- Exhibition Halls

● Solutions

- Architectural Lighting

PARMIN PENDANT

TECHNICAL SPECIFICATIONS

Review the technical specifications, dimensions, performance data, and related resources for Parmin Pendant

Index (Nominal Size)	300 × 300	600 × 600	1200 × 300
Optical characteristics			
LED Package Nominal Power (W)	1.5		
Initial SDCM (SDCM)	5		
Color Rendering Index	85		
LED Module Type	Integrated		
Light Source	SMD LED		
Lumen Maintenance Code	9		
LEDs Per Module (pcs)	40	72 120	72 120
Luminous Flux (lm)	2550	5000 7500	5000 7500
Luminaire Efficacy (lm/W)	106	125	125
Color Temperature (K)	4000 6500		
Electrical characteristics			
Input Voltage (V)	Min 180 Max 265		
Input Frequency (Hz)	Min 50 Max 60		
Nominal Input Voltage (V)	230		
Nominal Input Frequency (Hz)	50		
Power Factor	0.95		
Total Harmonic Distortion (%)	15		
Electric Shock Protection Class	I		
Type of Power Supply	Independent		
Power (W)	24	40 60	40 60
Nominal Input Current (A)	0.11	0.183 0.274	0.183 0.274
LED Module Operating Voltage (V)	57	18	18
General characteristics			
Mounting Type	Pendant Mounted		
Working Temperature Range (°C)	Min -45 Max 55		
Maximum Relative Humidity (%)	90		
Rated Useful Life L70B10 (h)	70000		
Warranty (year)	5		
Mechanical characteristics			
Housing Material	Polymer		
Optical Cover Material	PS		
Ingress Protection	IP42		
Dimensions (mm)	L: 300 · W: 300 · H: 51	L: 600 · W: 600 · H: 51	L: 1200 · W: 300 · H: 51
Weight (kg)	1	3.1	3.4

L: length · W: width · H: height · Ø: diameter


This is a compact product summary; visit the website for more details.

<https://golnoor.com/en/product/parmin-pendant>

Dimensions

Review overall dimensions and layout drawings for installation planning, placement, and site coordination.

Model	Weight	Dimensions (LxWxH)
30x30 cm	1 kg	300x300x51 mm
60x60 cm	3.1 kg	600x600x51 mm
60x60 cm (Emergency)	—	600x600x51 mm
30x120 cm	3.4 kg	1200x300x51 mm
30x120 cm (Emergency)	—	1200x300x51 mm

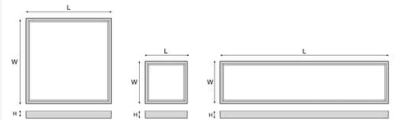

Golnoor

Light up Your Life

WWW.GOLNOOR.COM
