


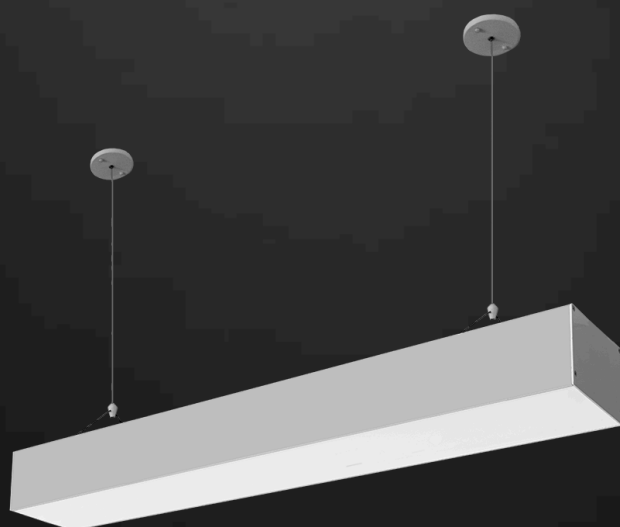

Pendant Light | Linear Light

PROXIMA-9-PENDANT

Golnoor

Light up Your Life

Learn more about “Proxima-9-pendant”

The Proxima 9 pendant light is a versatile indoor lighting solution, available in four lengths (57, 85, 112, and 170 cm) and four color temperature options. It's backed by a 5-year warranty, ensuring durability and reliability. Whether you're looking to illuminate a commercial space, office, or home, the Proxima 9 offers a stylish and functional lighting solution.



Class I



Continuous Mounted



High PF



LED luminaire



Loop Through



Modular




Suspended luminaire



Symmetrical light emission

- **Proxima-9-pendant**

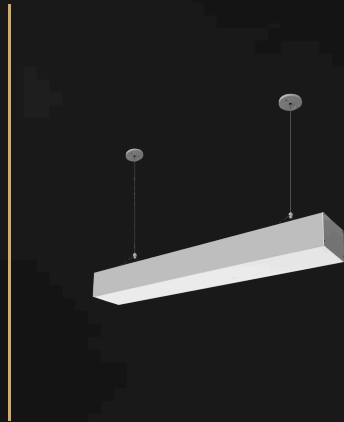

Pendant Light | Linear Light

5 years Golnoor Warranty

- **Index : Length (Millimetre)**

- 570
- 850
- 1120
- 1700

- **Applications**

- Indoor
- Retail & Commercial
- Offices
- Residential Complexes
- Healthcare
- Meeting & Conference Rooms
- Lobbies & Receptions
- Restaurants & Cafés
- Hotels
- Shops & Showrooms
- Libraries
- Exhibition Halls

- **Solutions**

- Architectural Lighting

PROXIMA-9-PENDANT

TECHNICAL SPECIFICATIONS

Review the technical specifications, dimensions, performance data, and related resources for Proxima-9-pendant

Index (Length (Millimetre))	570	850	1120	1700
Optical characteristics				
Initial SDCM (SDCM)	5			
Color Rendering Index	85			
LED Module Type	Integrated			
Light Source	SMD LED			
Lumen Maintenance Code	9			
Luminous Flux (lm)	1080 1900	1620 2850	2160 3800	3240 5700
Color Temperature (K)	3,000 ~ 6,500 3000 · 4000 · 5000 · 6500			
LEDs Per Module (pcs)	36 ~ 108 36 · 54 · 72 · 108			
Luminaire Efficacy (lm/W)	108 95			
Electrical characteristics				
Input Voltage (V)	Min 180 Max 265			
Input Frequency (Hz)	Min 50 Max 60			
Nominal Input Voltage (V)	230			
Nominal Input Frequency (Hz)	50			
Power Factor	0.95			
Total Harmonic Distortion (%)	15			
Electric Shock Protection Class	I			
LED Module Operating Voltage (V)	36			
Type of Power Supply	Independent			
Power (W)	10 20	15 30	20 40	30 60
Nominal Input Current (A)	0.046 ~ 0.275 0.046 · 0.07 · 0.09 · 0.14 · 0.18 · 0.275			
General characteristics				
Mounting Type	Pendant Mounted			
Working Temperature Range (°C)	Min -45 Max 55			
Maximum Relative Humidity (%)	90			
Rated Useful Life L70B10 (h)	70000			
Warranty (year)	5			
Mechanical characteristics				
Housing Material	Aluminium			
Optical Cover Material	PMMA			
Surface Finish	Electrostatic Powder Coating			
Ingress Protection	IP42			
Dimensions (mm)	L: 570 · W: 90 · H: 90	L: 850 · W: 90 · H: 90	L: 1120 · W: 90 · H: 90	L: 1700 · W: 90 · H: 90
Weight (kg)	1.8 ~ 5.6 1.8 · 2.8 · 3.7 · 5.6			

L: length · W: width · H: height · Ø: diameter


This is a compact product summary; visit the website for more details.

<https://golnoor.com/en/product/proxima-9-pendant>

Dimensions

Review overall dimensions and layout drawings for installation planning, placement, and site coordination.

Width	Length	Dimensions (LxWxH)	Weight
9 cm	570 mm	570x110x90 mm	1.8 kg
9 cm	850 mm	850x110x90 mm	2.8 kg
9 cm	1130 mm	1130x110x90 mm	3.7 kg
9 cm	1700 mm	1700x110x90 mm	5.6 kg
9 cm	570 mm	570x90x90 mm	1.8 kg
9 cm	850 mm	850x90x90 mm	2.8 kg
9 cm	1130 mm	1130x90x90 mm	3.7 kg
9 cm	1700 mm	1700x90x90 mm	5.6 kg

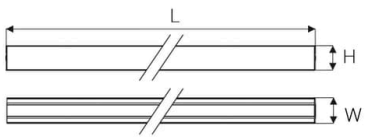

01 | Proxima-9-pendant

Golnoor

Light up Your Life

WWW.GOLNOOR.COM
