


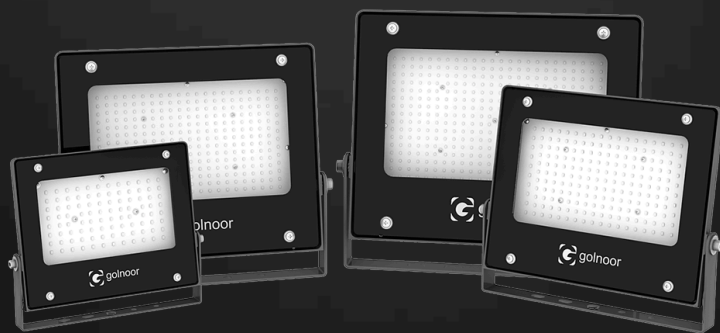

Flood Light

RONAK

Golnoor

Light up Your Life



Learn more about “Ronak”

Ronak LED Light is a ceiling and wall-mounted LED light, suitable for outdoor lighting, walkways, and exterior buildings. With an IP66 protection rating, it's resistant to water and dust. Its IK07 protection rating ensures resistance to mechanical impact. Available in 50, 100, 150, and 200 watt options.



Class I



Flood Lighting



High PF



IP66



LED luminaire



Modular



Quick installation




Symmetrical light emission



Wall luminaire

- **Ronak**



Flood Light

3 years Golnoor Warranty

- **Index : Power (watt)**

- 50
- 100
- 150
- 200

- **Applications**

- Outdoor
- Landscape
- Facades

RONAK

TECHNICAL SPECIFICATIONS

Review the technical specifications, dimensions, performance data, and related resources for Ronak


Index (Power (watt))	50	100	150	200
Optical characteristics				
LED Package Nominal Power (W)	1.2			
Luminaire Efficacy (lm/W)	110			
Initial SDCM (SDCM)	5			
Color Rendering Index	75			
LED Module Type	Integrated			
Light Distribution Angle (°)	120			
Light Source	SMD LED			
Lumen Maintenance Code	9			
LEDs Per Module (pcs)	96	192	288	384
Luminous Flux (lm)	5500	11000	16500	22000
Color Temperature (K)	3000 4000 6500			
Electrical characteristics				
Input Voltage (V)	Min 220 Max 240			
Input Frequency (Hz)	Min 50 Max 60			
Nominal Input Voltage (V)	230			
Nominal Input Frequency (Hz)	50			
Power Factor	0.97			
Total Harmonic Distortion (%)	20			
Electric Shock Protection Class	I			
LED Module Operating Voltage (V)	288			
Type of Power Supply	Integrated			
Nominal Input Current (A)	0.22	0.435	0.66	0.87
General characteristics				
Mounting Type	Pole Mounted Surface Mounted Wall Mounted			
Working Temperature Range (°C)	Min -45 Max 55			
Maximum Relative Humidity (%)	95			
Rated Useful Life L70B10 (h)	70000			
Warranty (year)	3			
Mechanical characteristics				
Housing Material	Die-Cast Aluminum			
Optical Cover Material	Tempered Glass			
RAL Colour	Graphite Grey (RAL 7024)			
Surface Finish	Electrostatic Powder Coating			
Surface Texture	Sanded			
Ingress Protection	IP66			
Weight (kg)	1.6	2.7	3.8	5

This is a compact product summary; visit the website for more details.

<https://golnoor.com/en/product/ronak>

Dimensions

Review overall dimensions and layout drawings for installation planning, placement, and site coordination.

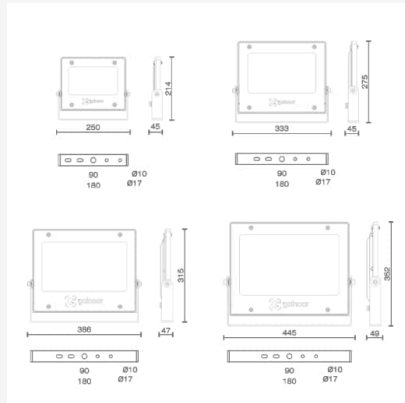

Golnoor

Light up Your Life

WWW.GOLNOOR.COM
