



Street Light

SARINA

Golnoor

Light up Your Life



Learn more about “Sarina”

The Sarina street light is a street light with a power of 20 to 35 watts and a color temperature of 3000 to 6500 Kelvin. This light has an SMD LED light source with an aluminum die-cast body and a powder-coated electrostatic paint finish in black RAL (9005). With an IP66 rating, it has a high degree of water resistance and can be used in all outdoor areas.



Asymmetrical



Class I



High PF



IP66



LED luminaire



Quick installation



Street Lighting

● Sarina



Street Light

5 years Golnoor Warranty

● Index : Power (watt)

- 20
- 25
- 30
- 35

● Applications

- Outdoor
- Streets & Roads
- Landscape
- Local Access Roads
- Sidewalks & Pedestrian Paths

● Solutions

- Road & Highway Lighting

SARINA

TECHNICAL SPECIFICATIONS

Review the technical specifications, dimensions, performance data, and related resources for Sarina

Index (Power (watt))	20	25	30	35
Optical characteristics				
LED Package Nominal Power (W)	1.5			
Initial SDCM (SDCM)	5			
Color Rendering Index	75			
LED Module Type	Integrated			
Light Source	SMD LED			
Lumen Maintenance Code	9			
LEDs Per Module (pcs)	100	100	98	98
Luminous Flux (lm)	2600	3200	3700	4200
Luminaire Efficacy (lm/W)	130	128	123	120
Color Temperature (K)	3,000 ~ 6,500 3000 · 4000 · 5000 · 6500			
Electrical characteristics				
Input Voltage (V)	Min 180 Max 265			
Input Frequency (Hz)	Min 50 Max 60			
Nominal Input Voltage (V)	230			
Nominal Input Frequency (Hz)	50			
Power Factor	0.95			
Total Harmonic Distortion (%)	20			
Electric Shock Protection Class	I			
LED Module Operating Voltage (V)	Min 85 Max 230			
Type of Power Supply	Independent			
Nominal Input Current (A)	0.09	0.115	0.137	0.16
General characteristics				
Mounting Type	Pole Mounted			
Working Temperature Range (°C)	Min -45 Max 55			
Maximum Relative Humidity (%)	95			
Rated Useful Life L70B10 (h)	100000			
Warranty (year)	5			
Mechanical characteristics				
Housing Material	Die-Cast Aluminum			
Optical Cover Material	Tempered Glass			
RAL Colour	Jet Black (RAL 9005)			
Surface Finish	Electrostatic Powder Coating			
Dimensions (mm)	L: 396 · W: 166 · H: 88			
Weight (kg)	Min 2.28 Max 2.37			
Spigot Diameter (mm)	33 42			
Default Spigot Diameter (mm)	33			
Ingress Protection	IP66			


L: length · W: width · H: height · Ø: diameter

This is a compact product summary; visit the website for more details.

<https://golnoor.com/en/product/sarina>


Rotatable angles

Adjustable angles enable precise aiming and suitable surface coverage across different applications.

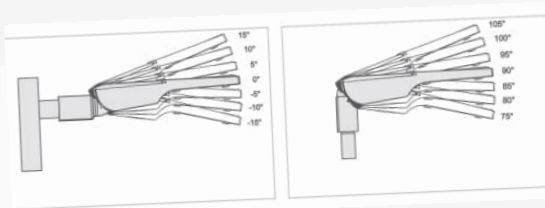

Dimensions

Review overall dimensions and layout drawings for installation planning, placement, and site coordination.

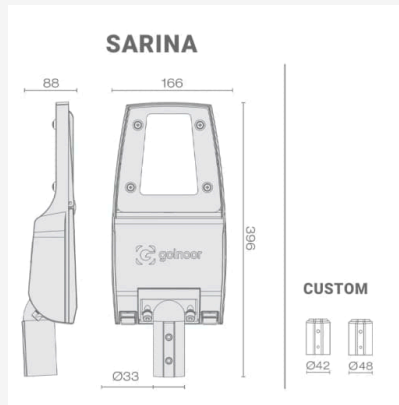

01 | Sarina

Golnoor

Light up Your Life

WWW.GOLNOOR.COM
